



Car Seat Covers Installation Guide

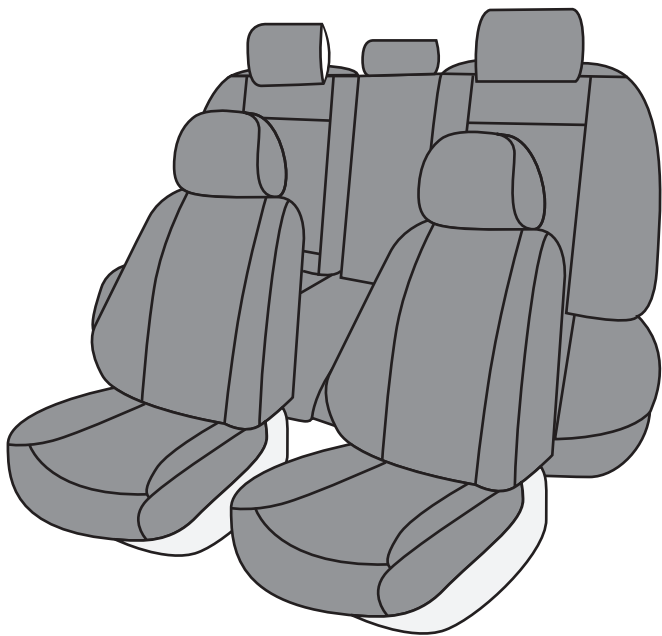

Kind Note:

Please confirm the seat cover type (Style 1 for one-piece front, Style 2 for split front) and install accordingly.

Assembly method for using accessories

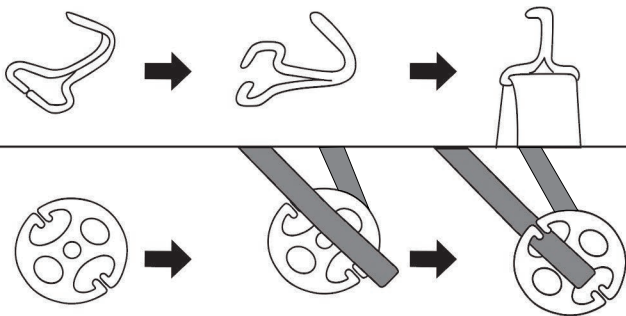


Style 1 Connected Front Seat



Chucks X4

Hooks X4




As shown in the diagram,
first install the accessories

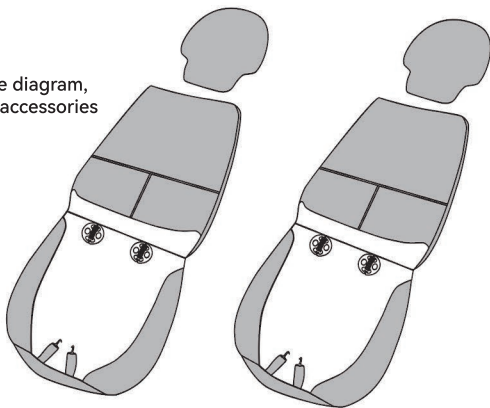



Front seat covers installatio




1. Remove the original headrest, install the seat cushion, and instal the clamp disk.






2. Insert the clamp into the seat gap and install the original headrest



OR



3. Zip up, and secure the hook under the seat




4. Put on the head cap and secure the bottom firmly



Chucks X8

Hooks X4


As shown in the diagram, first install the accessories

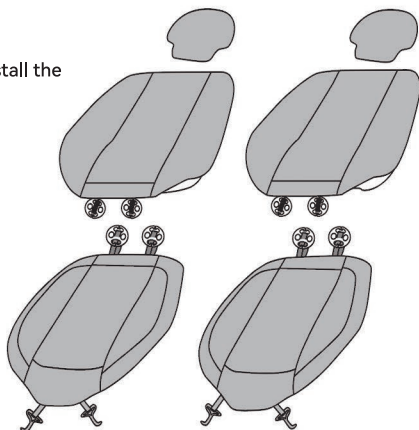



Front seat covers installation

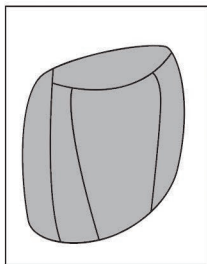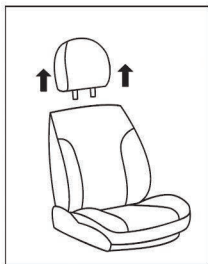



Front Seat Covers Installation

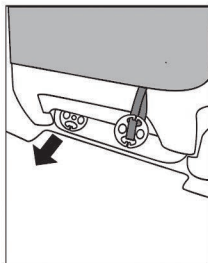

1. Remove the original headrest, install the seat cushion, and install the clamp disk.

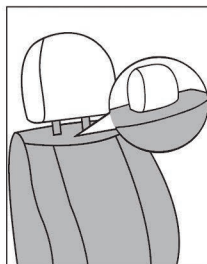
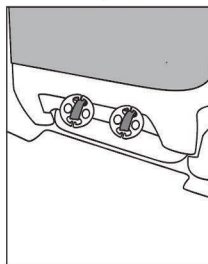


2. Insert the clamp into the seat gap and install the original headrest

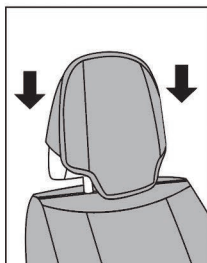
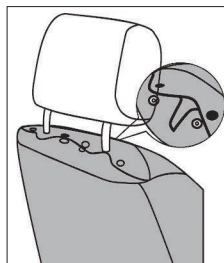


3. Button up, and secure the hook under the seat


Front seat covers installatio

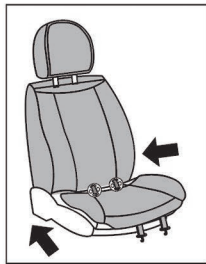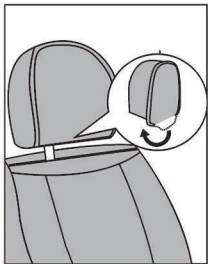



4. Put on the head cap and secure the bottom firmly

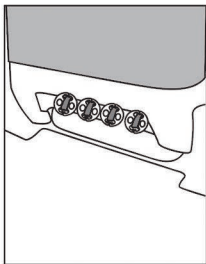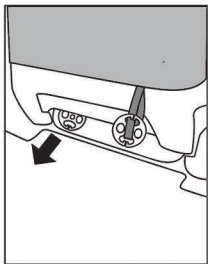

5. Insert the clamp into the seat gap

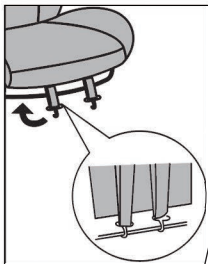


OR

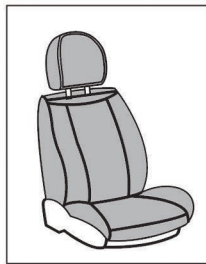

Rear Seat Covers Installation


Preparing for rear seat installation

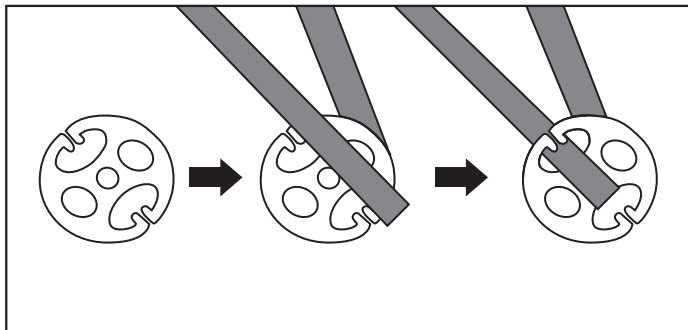




Rear Seat Installation

Chucks X9



As shown in the diagram, first install the accessories

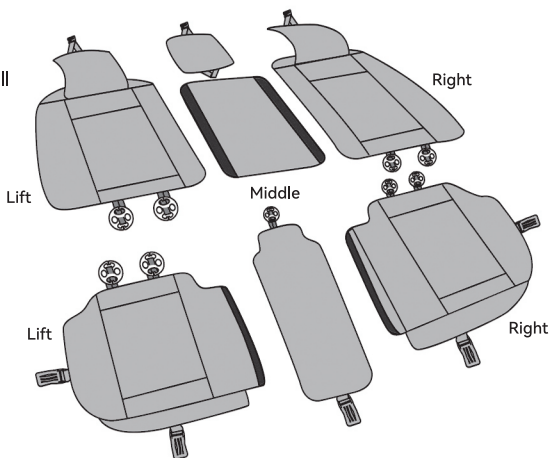



No need to remove the rear seat bottom

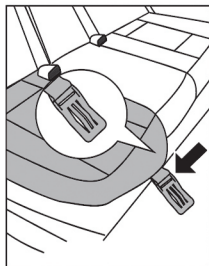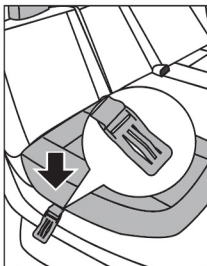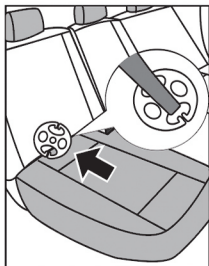

1. Lay down the rear seat cushion and secure the buckles and clips

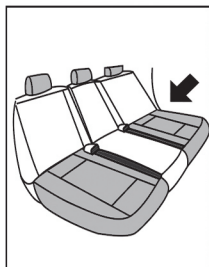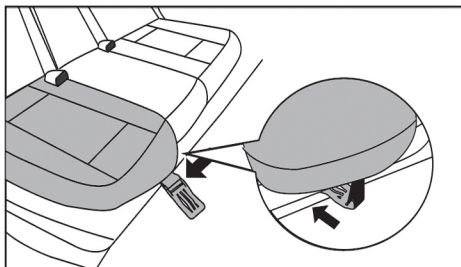


2. Insert the buckle into the seat gap and lay down the other cushion

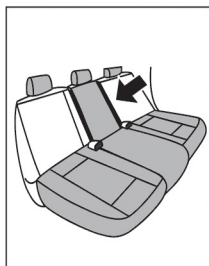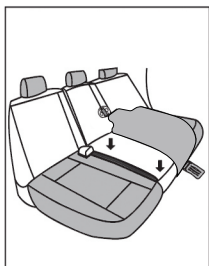


3. Install the base and the middle connecting plate of the badSkrest


Rear Seat Installation

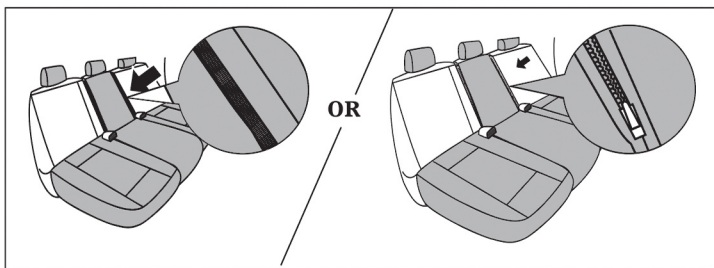

4. The connecting piece is secured by either Velcro or a zipper.

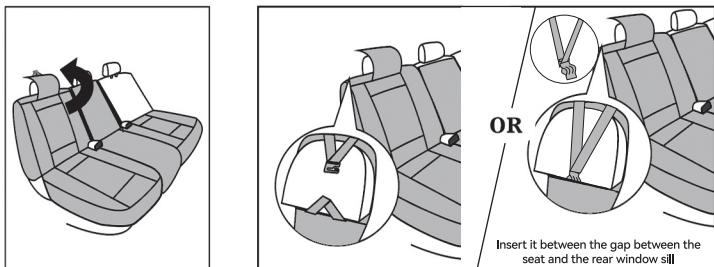

5. Install the rear seat back cushion, and secure the buckle on the headrest to the buckle plate underneath the cushion.

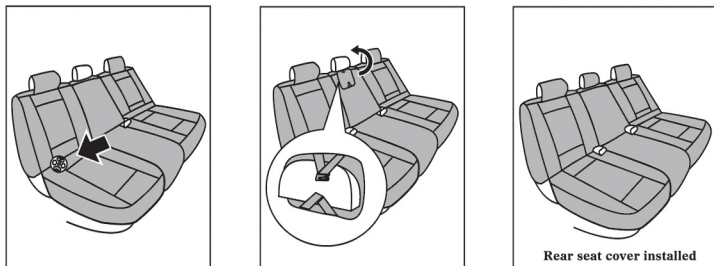

6. Install the small middle cap, rear row installation complete.